

2.5 Square strip 26 wall/ceiling LED 2-wire dimming

SPECIFICATIONS

RD902L83006A



Design By

Ron Rezek

Collection

Design



Specifications

Delivered lumens	1312lm
Light output ratio	87.47lm/W
Power consumption	15W
Led type	12W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	Dimmable 2-Wire**
Input Voltage	120-277V
Driver	HATCH - 1 x XTC32-0700P-UNV-I

**Reverse or forward phase (120v only)

Colors & Finishes

- Anodized aluminum (Body)
- Grey (End caps & Canopy)


Materials

- Diffuser in extruded acrylic with frosted acrylic
- Body in extruded aluminum
- End caps in die-cast aluminum

Features & Accessories

- Supplied with cover plate for mounting to standard electrical junction boxes
- Possibility of "pig-tail" mounting directly to wall surface

Dimensions

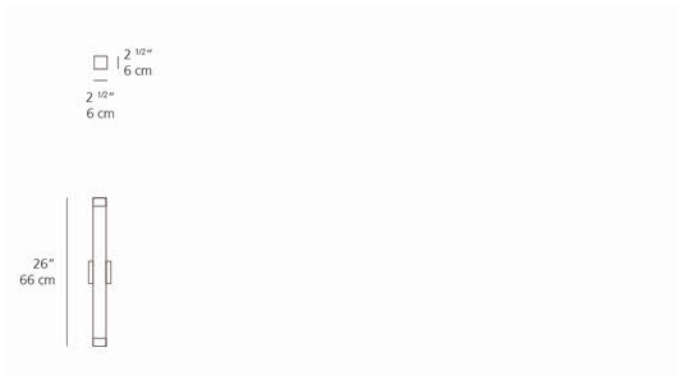

Packaging

1 Box


1 x 33-3/16" x 5-13/16" x 5-13/16" / lbs - 84 cm x 14.5 cm x 14.5 cm / kg

Light distribution

Direct

Luminaire weight

0 lbs / 0 kg



Red = Max Cd. Through Vertical plane
Blue = Max Cd. Through Horizontal plane

Warranty

5 year limited warranty,
Upon registration. Click here
to register your purchase.

2.5 Square strip 37 wall/ceiling LED 2-wire dimming aluminum

SPECIFICATIONS

RD903L83006A



Design By

Ron Rezek

Collection

Design



Specifications

Delivered lumens	1968lm
Light output ratio	85.57lm/W
Power consumption	23W
Led type	21W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	Dimmable 2-Wire**
Input Voltage	120-277V
Driver	HATCH - 1 x XTC34-1050P-UNV-I

**Reverse or forward phase (120v only)

Colors & Finishes

- Anodized aluminum (Body)
- Grey (End caps & Canopy)

Materials

- Diffuser in extruded acrylic with frosted acrylic
- Body in extruded aluminum
- End caps in die-cast aluminum

Features & Accessories

- Supplied with cover plate for mounting to standard electrical junction boxes
- Possibility of "pig-tail" mounting directly to wall surface

Dimensions



Packaging

1 Box


1 x 44-3/16" x 5-13/16" x 5-13/16" / lbs - 112 cm x 14.5 cm x 14.5 cm / kg

Light distribution

Direct

Luminaire weight

0 lbs / 0 kg



Red = Max Cd. Through Vertical plane

Blue = Max Cd. Through Horizontal plane

Warranty

5 year limited warranty, Upon registration. Click here to register your purchase.

2.5 Square strip 49 wall/ceiling LED 2-wire dimming

SPECIFICATIONS

RD904L83006A



Design By

Ron Rezek

Collection

Design



Specifications

Delivered lumens	2618lm
Light output ratio	84.45lm/W
Power consumption	31W
Led type	27W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	Dimmable 2-Wire**
Input Voltage	120-277V
Driver	HATCH - 1 x XTC34-1050P-UNV-I

**Reverse or forward phase (120v only)

Colors & Finishes

- Anodized aluminum (Body)
- Grey (End caps & Canopy)


Materials

- Diffuser in extruded acrylic with frosted acrylic
- Body in extruded aluminum
- End caps in die-cast aluminum

Features & Accessories

- Supplied with cover plate for mounting to standard electrical junction boxes
- Possibility of "pig-tail" mounting directly to wall surface

Dimensions

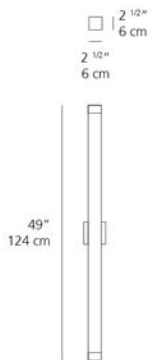

Packaging

1 Box

1 x 56-3/8" x 5-13/16" x 5-13/16" / lbs - 143 cm x 14.5 cm x 14.5 cm / kg

Light distribution

Direct

Luminaire weight

0 lbs / 0 kg

Warranty

5 year limited warranty, Upon registration. Click here to register your purchase.